



## LINEA: Flat 2P+E P40 Universal outlet canvas

---

### 30211.C

Wiring devices / Traditional wiring devices / LINEA / Devices

#### Flat 2P+E P40 Universal outlet canvas

SICURY 2P+T 16 A 250 V~ universal socket outlet, Italian standard P40, flush-fitting, canvas - 2 modules


#### Product Status

3 - Active

#### Minimum order quantity

20 NR

#### Drawings

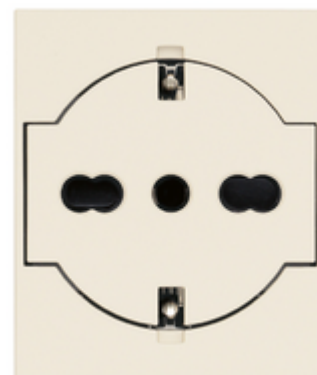

## Technical data

- **Class group:** Domestic switching devices
- **Class:** Socket outlet
- **Model:** Other
- **Number of active contacts (round):** 0
- **Number of active contacts (flat):** 0
- **Number of active contacts (square):** 0
- **With signal lamp:** No
- **Number of ports USB-A:** 0
- **Number of ports USB-C:** 0
- **Number of units:** 1
- **Number of modules (module system):** 2
- **Number of socket outlets switchable:** 0
- **Number of phases:** 1
- **Imprint/indication:** Other
- **Connection type:** Screwed terminal
- **With hinged lid:** No
- **With enhanced contact protection:** Yes
- **Label space/information surface:** No
- **Colour:** Beige
- **RAL-number (similar):** 7032
- **Metallic colour:** No
- **Transparent:** No
- **Lockable:** No
- **Eject-mechanism:** No
- **Insulated mounting:** No
- **With function lighting:** No
- **With orientation lighting:** No
- **Over voltage protection:** No
- **Fault current protection:** No
- **With miniature fuse:** No
- **Special power supply:** No special power supply
- **Mounting method:** Flush-mounted
- **Type of fastening:** Snap mounting (engagement)
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Halogen free:** Yes
- **Surface protection:** Untreated
- **Surface finishing:** Matt
- **Anti-bacterial treatment:** No
- **With loop through function:** No
- **With on/off switch:** No
- **Rotated central insert:** No
- **Nominal current:** 16 A
- **Nominal voltage:** 250 V
- **Frequency:** 50,00 - 60,00 HZ
- **Rated fault current:** 0 mA
- **Suitable for degree of protection (IP):** IP20
- **Impact strength:** Other
- **Device width:** 44,80 mm
- **Device height:** 52,80 mm
- **Device depth:** 36,10 mm
- **Compatible with Apple HomeKit:** No
- **Compatible with Amazon Alexa:** No
- **Compatible with Google Assistant:** No
- **IFTTT support available:** No
- **With Wi-Fi signal repeater:** No
- **With built-in bluetooth speaker:** No
- **For heavy conditions according to VDE:** No

## Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

# Packaging



8 007352 699670

**Code** 8007352699670  
**Quantity** 1 NR  
**Dim.** 5.2x4.3x5.6 [cm]  
**Weight** 50.4 [g]



8 007352 699694

**Code** 8007352699694  
**Quantity** 20 NR  
**Dim.** 23x11.2x12.8 [cm]  
**Weight** 1,100 [g]



8 007352 699717

**Code** 8007352699717  
**Quantity** 120 NR  
**Dim.** 35x25x27.5 [cm]  
**Weight** 6,942 [g]



8 007352 750074

**Code** 8007352750074  
**Quantity** 3,240 NR  
**Dim.** 120x80x105 [cm]  
**Weight** 187,434 [g]

# Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).