




LINEA: TV-RD-SAT single-conn.out.2outs canvas

30302.01C

Wiring devices / Traditional wiring devices / LINEA / Devices

TV-RD-SAT single-conn.out.2outs canvas

TV-RD-SAT coaxial socket outlet, 5-2400 Mhz, single connection, demixed, 2 outputs with male connector (TV-RD) and female connector type F (SAT), 1 dB connection attenuation, canvas - 2 modules. Allows the passage of DC current and control signals (24 V 500 mA max)

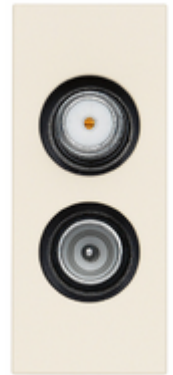

Product Status

3 - Active

Minimum order quantity

10 NR

Drawings

Technical data

- **Class group:** Antenna and satellite technique
- **Class:** Antenna socket box
- **Model:** TWIN end socket
- **Type of socket outlet:** TV/RD/SAT
- **Mounting method:** Flush-mounted
- **Number of modules (module system):** 1
- **Cover:** None
- **Tap loss at 860 MHz:** 1,00 dB
- **Tap loss at 2150 MHz:** 1,00 dB
- **Number of outlets:** 2
- **Suitable for cable modem:** No
- **TV frequency band:** 5 - 2.400 MHz
- **Suitable for remote power supply:** Yes
- **Radio frequency band:** 5 - 2.400 MHz
- **SAT frequency band:** 5 - 2.400 MHz
- **Type of fastening:** Snap mounting (engagement)
- **Colour:** Beige
- **RAL-number (similar):** 7032
- **Surface protection:** Untreated
- **Surface finishing:** Matt
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Halogen free:** Yes
- **Anti-bacterial treatment:** No
- **Degree of protection (IP):** IP20
- **Device width:** 2.230,00 mm
- **Device height:** 5.280,00 mm
- **Device depth:** 3.920,00 mm

Certifications

- 00. CE Marking - EU
- 00. CE Marking - EU
- 37. Marking - Morocco
- 99. WEEE Directive ([download](#))

Packaging



8 007352689800

Code 8007352689800
Quantity 1 NR
Dim. 4.6x2.7x5.6 [cm]
Weight 54.4 [g]



8 007352689817

Code 8007352689817
Quantity 10 NR
Dim. 14.6x10x6.6 [cm]
Weight 593.2 [g]



8 007352689824

Code 8007352689824
Quantity 120 NR
Dim. 31x22x21 [cm]
Weight 7,388.4 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).